


Dosatore proporzionale idrodinamico.
 Testa e ghiera in ottone cromato con rivestimento protettivo conforme al DM 174/2004, con valvola di sfianto aria.
 Tazza trasparente in Trogamid T
 Attacco orientabile in ottone cromato per fissaggio in tutte le posizioni.
 Estrema precisione del dosaggio del polifosfato in polvere (2 ppm) con sistema Venturi.
 Portata 0,7 m³/h.
 Dimensioni (mm.) A = 110, B = 150
 Ricambio PN 55.

DPN 010

1/2"




*Proportional hydrodynamic batcher.
 Head and nut in chromum plating brass with protective lining suitable for drinking water, with air-valve.
 Bowl in transparent Trogamid T.
 Brass connections allowing to fix the batcher in all positions.
 Highly exact batching of the powder of poliphosphate (2 ppm.) by Venturi system. Flow 0,7 m³/h.
 Dimensions (mm.) A = 110, B = 150
 Refill PN 55.*

Dosatore di polifosfato in cristalli.
 Testa e ghiera in polipropilene.
 Tazza trasparente AS.
 Attacchi 1/2" a 90° con uscita in alto.
 Tenuta O-ring.
 Dosaggio previsto polifosfato c.ca 2-3 gr/m³.
 Portata 0,7 m³/h.
 Dimensioni (mm.) A = 91, B = 165
 Ricambio PNC-1

DPF 05

1/2"




*Poliphosphate (salt) batcher.
 Head and nut in polypropylene.
 Bowl in transparent AS.
 Connections 1/2" at 90° angle with top outlet.
 O-ring seal.
 Approx dosage 2-3 gr/m³.
 Flow rate max 0,7 m³/h.
 Dimensions (mm.) A = 91, B = 165
 Refill PNC-1 .*

Dosatore polifosfato in cristalli.
 Testa e ghiera in ottone cromato con rivestimento protettivo conforme al DM 174/2004.
 Tazza trasparente in Trogamid T.
 Tenuta O - ring.
 Dosaggio c.ca 2-3 gr/m³
 Portata: 0,7 m³/h.
 Dimensioni (mm.) A = 95, B = 163.
 Ricambio PNC-1

DPF 010

1/2"




*Poliphosphate (salt) batcher.
 Head and nut in chromum plating brass with protective lining suitable for drinking water. Bowl in transparent Trogamid T.
 O-ring seal. Approx dosage 2-3 gr/m³.
 Flow rate: 0,7 m³/h.
 Dimensions (mm.) A = 95, B = 163
 Refill PNC-1*

Filtro a carbone attivo.
 Testa e ghiera in polipropilene con sfianto aria.
 Tazza in policarbonato trasparente.
 Attacchi con inserti in ottone 3/4" - 1".
 Tenuta O-ring.
 Carbone attivo contenuto in una cartuccia trasparente.
 Portata max
 3/4" = 0,3 m³/h; 1" = 0,4 m³/h
 Dimensioni (mm.) A = 126, B = 326
 Ricambio CRC010

FCA 10

3/4"
1"




*Activated carbon cartridge filter.
 Head and nut in polypropylene with air-valve. Bowl in transparent AS.
 Connections 3/4" - 1" with brass insert.
 O-ring seal.
 Activated carbon contained in a cylinder transparent cartridge (10").
 Max flow rates
 3/4" = 0,3 m³/h 1" = 0,4 m³/h.
 Dimensions (mm.) A = 126, B = 326.
 Refill CRC010*

Dosatore di polifosfati.
 Testa e ghiera in polipropilene con sfianto aria.
 Tazza in policarbonato trasparente.
 Attacchi con inserti in ottone 3/4" - 1"
 Tenuta O - ring.
 Polifosfati in cristalli contenuti in una cartuccia trasparente.
 Dosaggio c.ca 2-3 gr/m³.
 Portata max
 3/4" = 2,0 m³/h; 1" = 2,5 m³/h
 Dimensioni (mm.) A = 126, B = 326.
 Ricambio PFD35

PFD 35

3/4"
1"

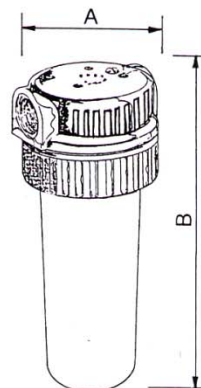

*Poliphosphate (salt) batcher.
 Head and nut in polypropylene with air-valve. Bowl in transparent AS.
 Connections 3/4" - 1" with brass insert.
 O-ring seal.
 Poliphosphate salts contained in a cylinder, transparent cartridge, with a dosing rate about 2-3 gr/m³.
 Max flow rates
 3/4" = 2,0 m³/h - 1" = 2,5 m³/h
 Dimensions (mm.) A = 126, B = 326.
 Refill PFD35.*

Dosatore proporzionale idrodinamico.
Testa e ghiera in ottone cromato con rivestimento protettivo conforme al DM 174/2004, con valvola di sfiato aria.

Tazza in policarbonato trasparente.
Attacco orientabile in ottone cromato per fissaggio in ogni posizione.

Estrema precisione del dosaggio del polifosfato in polvere (2 ppm) con sistema Venturi.


Portata max 2,5 m³/h.

Dimensioni (mm.) A = 120, B = 320

Ricambio PN 55.

DPN 050

3/4"



*Proportional hydrodynamic batcher.
Head and nut in chromum plating brass with protective lining suitable for drinking water, with air-valve.
Bowl in transparent Trogamid T.*

Brass connections allowing to fix the batcher in all positions.

Highly exact batching of the powder of poliphosphate (2 ppm.) by Venturi system. Flow 2,5 m³/h.

Dimensions (mm.) A = 120, B = 320

Refill PN 55

Dosatore proporzionale idrodinamico.

Testa e ghiera in ottone cromato con rivestimento protettivo conforme al DM 174/2004, con valvola di sfiato aria.

Tazza in policarbonato trasparente.

Attacco orientabile in ottone cromato per fissaggio in ogni posizione.

Estrema precisione del dosaggio del polifosfato in polvere (2 ppm) con sistema Venturi.


Portata max 3,0 m³/h.

Dimensioni (mm.) A = 120 B = 320

Ricambio PN 55.

DPN 070

1"



Proportional hydrodynamic batcher.

Head and nut in chromum plating brass with protective lining suitable for drinking water, with air - valve.

Bowl in transparent Trogamid T.

Brass connections allowing to fix the batcher in all positions.

Highly exact batching of the powder of poliphosphate (2 ppm.) by Venturi system. Flow 3,0 m³/h.

Dimensions (mm.) A = 120, B = 320

Refill PN 55

Dosatore di polifosfato in cristalli.

Testa e fascia chiusura in ottone cromato con rivestimento protettivo conforme al DM 174/2004.

Tazza in policarbonato trasparente.

Tenuta O-ring.

Cartuccia con sali di polifosfato in cristalli.

Dosaggio 2-3 gr/m³

Attacchi 3/4"


Portata: 2,0 m³/h.

Dimensioni (mm) A = 132, B = 330

Ricambio PFD 35.

DPF 050

3/4"



Poliphosphate (salt) batcher.

Head and nut in chromum plating brass with protective lining suitable for drinking water with air-valve.

Bowl in transparent Trogamid T.

Connections 3/4"

O-ring seal.

Poliphosphate salts contained in a cylinder, transparent cartridge, with a dosing rate about 2-3 gr/m³.

Max flow rate 2,0 m³/h

Dimensions (mm.) A = 132, B = 330.

Refill PFD 35.

Dosatore di polifosfato in cristalli.

Testa e fascia chiusura in ottone cromato con rivestimento protettivo conforme al DM 174/2004.

Tazza in policarbonato trasparente.

Tenuta O-ring.

Cartuccia con sali di polifosfato in cristalli

Dosaggio 2-3 gr/m³

Attacchi 1"


Portata 2,5 m³/h

Dimensioni (mm.) A = 132, B = 330

Ricambio PFD 35

DPF 070

1"



Poliphosphate (salt) batcher.

Head and nut in chromum plating brass with protective lining suitable for drinking water, with air-valve.

Bowl in transparent Trogamid T.

Connections 1"

O-ring seal.

Poliphosphate salts contained in a cylinder, transparent cartridge, with a dosing rate about 2-3 gr/m³.

Max flow rate 2,5 m³/h

Dimensions (mm.) A = 132, B = 330.

Refill PFD 35.